



H-52

URBAN MOTO

Bringing off road action to the suburbs, the H-52 takes it all the way to your back door. Whether it's sunrise sessions or midnight motocross the H-52 has everything it takes to break the barrier of sound and keep the neighbours on your side.

#FLYUNDERTHERADAR




#DESERTSTORM




#PITCHBLACK



WEIGHT

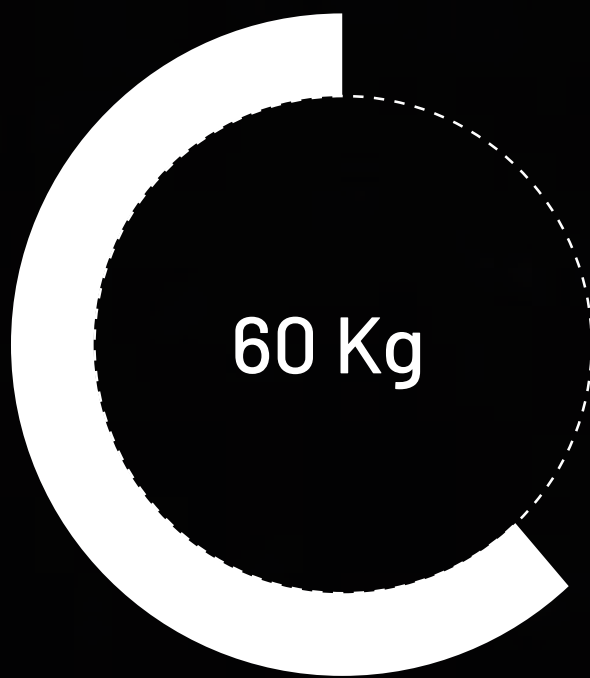

SPEED

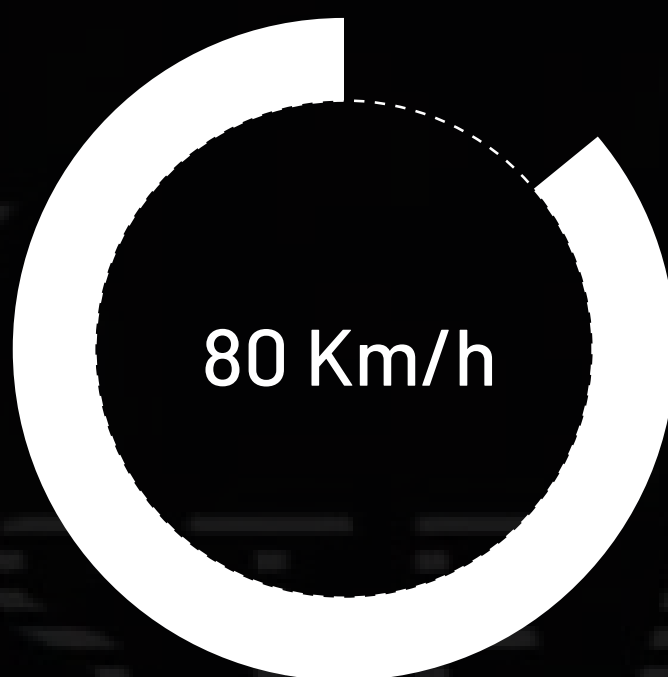

RANGE



RECHARGE





DIMENSION AND WEIGHT

Wheelbase	1356 mm
Overall length	2102 mm
Overall width	800 mm
Weight	60 Kg

ENGINE

Type	Brushless DC (Direct Drive) hub motor
Continuous Power	2500 Watt
Peak power	6200 Watt
Max torque	150Nm (approx)

FRAME

Type	Cut and folded sheet metal
Material	4130 CrMo

ELECTRICAL BATTERY

Type	Lithium ion battery 2.5 kWh
Electrical characteristics	22S 30Ah (81.4V)
Weight	13.0 kg
Recharge time	3 hours from 110V/240V

FAIRING

Front mudguard	OPTIONAL
Rear mudguard	OPTIONAL
Controller Cover	OPTIONAL

FRONT SUSPENSION

Type	ALX13 RC 750L (Inverted Double Crown)
Fork diameter	37 mm
Fork travel	180 mm

REAR SUSPENSION

Type	BF A02AR
Rear travel (wheel)	200 mm

WHEELS

Front wheel diameter	27.5"
Rear wheel diameter	27.5"

TYRES

Front tyre	27.5x2.8"
Rear tyre	27.5x2.8"

BRAKES

<i>Front brake</i>	Formula Minicross 65
Front brake caliper	Hydraulic 4 pistons
Front brake disk diameter	250 mm
Front brake disk thickness	3 mm
<i>Rear brake caliper</i>	Formula Minicross 65
Rear brake caliper	Hydraulic 4 pistons
Rear brake disk diameter	250 mm
Rear brake disk thickness	3 mm
<i>REGEN Braking</i>	YES

PERFORMANCE

Maximum speed	80 Km/h
Range	70 Km (@45Km/h)

WANT TO GET IN TOUCH?

GIVE US A SHOUT!

stealthelectricbikes.com



[stealthelectricbikes](https://www.facebook.com/stealthelectricbikes)



[stealth_bikes_hq](https://www.instagram.com/stealth_bikes_hq)

Phone - +61 39574 0257

Mail - sales@stealthelectricbikes.com